
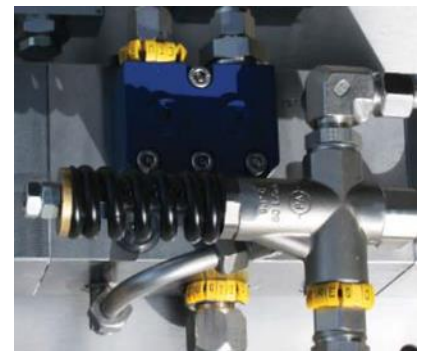


0-520Bar Jetting System

Dredging & Jetting Tools

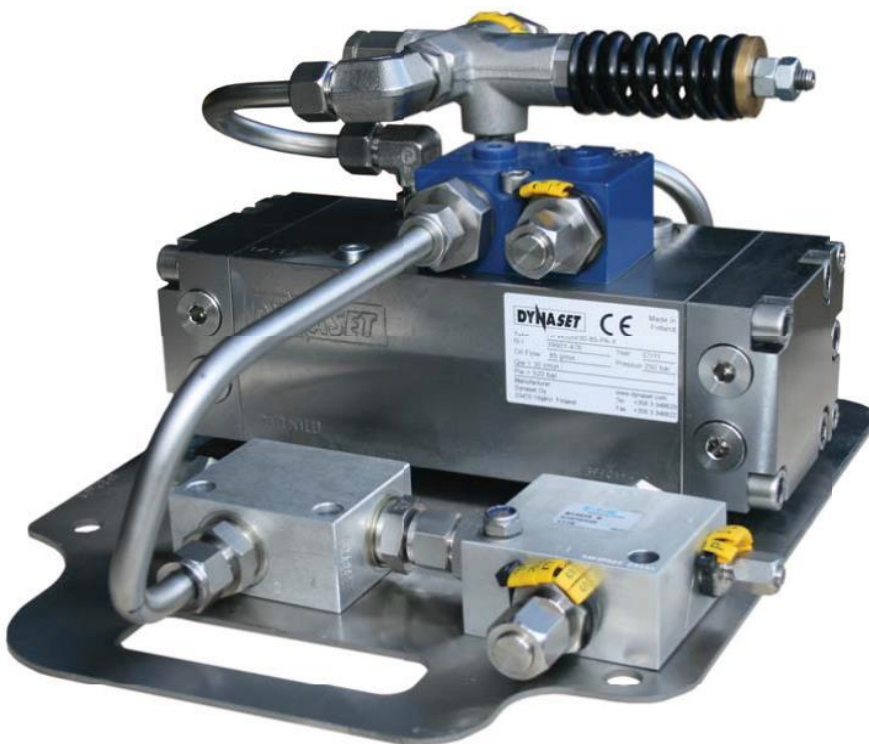

DESCRIPTION

Specialist ROV Tooling Services Ltd 0-520Bar Jetting System is widely recognised and used throughout world due to its reliability and impressive pumping capabilities; no other system offers the same power and reliability.

The Integral relief valve is adjustable to provide any pressure range desired from 0.5 – 520 Bar.

The pump is suitable for connection to any subsea reservoir via the 3/4 suction port.

The system is designed to be capable of pumping water, sea water, hydraulic oil or glycol.

This highly versatile system can be used as either an IHPU or Jetting system making it an invaluable and effective tool for any ROV system.

FEATURES

- World renowned Jetting system
- Huge range of nozzles and accessories available for different tasks
- Supplied with T bar nozzle assembly
- Mounted on ROV friendly plate
- Only 27kg in air

0-520Bar Jetting System

Dredging & Jetting Tools

HYDRAULIC INPUT

- Pressure 180-210Bar (3000psi)
- Flow 30-60Lmin

OUTPUT

- Pressure 0.5-520Bar (7500psi)
- Flow 15-30Lmin

SPECIFICATIONS

- Maximum Jetting 400Bar (Standard Nozzle)
- Unit supplied with:
 - PO Check valve
 - Flow control valve
 - Integral relief valve (0.5 – 520Bar)

DIMENSIONS

- (L) 380mm x (B) 305mm x (H) 300mm at highest

WEIGHT

- 27Kg in air



FLUIDS

- Water
- Sea Water
- Hydraulic oil
- Glycol

PART NUMBERS & OPTIONS

SRTS-09
SRTS-09-S

0-520Bar Jetting System
Remote location spares kit

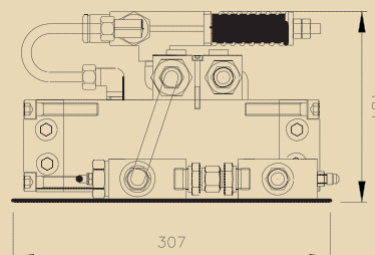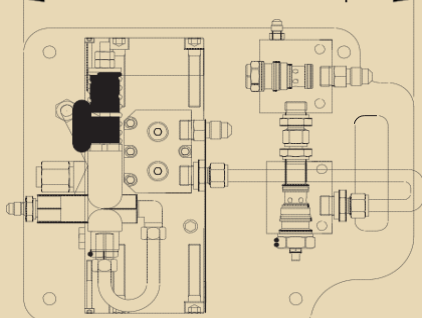

WHAT'S IN THE BOX

- 0-520Bar Jetting System
- Operational hoses
- T bar nozzle handle
- Turbo nozzle
- Suction Filter
- Operation manual